



**DAS ORIGINAL**

**Roll-Prof**

**SEIT 1978**

**einfach.besser.echt!**

**THE ORIGINAL  
SINCE 1978.**



## QUALITY THAT LASTS.

As a family-owned company for over 90 years now, we operate with strong roots in our region and responsibility for future generations.

Under the name of LÜBBERING we develop, produce and distribute „technical ideas for demanding users“ from Herzebrock in East Westphalia. Since 2000, Achim Lübbering has been running the company in the third generation. He is happy to have the support of his daughter Jette, who has been enriching the team with new ideas since 2022.

It was exactly such a technical idea that Johannes Lübbering used in 1978 to lay the foundation for the company's success: the Rollprofi. This cable reel uncoiler – technically sophisticated and equipped with two sturdy reel bearing rollers – freed any electrician of the problem of unwinding cable reels. Proved for many years, the Rollprofi has become established as the base product in the electrical installation. Often imitated, the cable reel roller from LÜBBERING was named as only it deserves: ORIGINAL.

Founded by Wilhelm Strotkamp in 1934 as an electrical installation company we have since become the leading manufacturer of cable unwinding systems. With a great passion for technology and quality we are constantly developing our knowledge and skills. This is how new ideas and products of outstanding quality are created here every day – so that electrical installers all over the world can continue to entrust their rolling goods to the Rollprofi product family

Welcome to Rollprofi!

  
Achim Lübbering

  
Jette Lübbering





# CABLE REEL ROLLER

**ORIGINAL**

**ORIGINALXS**

**ORIGINALXL**

**new** **TOPROLL**

# HANDLING

**CONTOUR**

**CARRYGRIP**



# THERE CAN ONLY BE ONE!

THE UNRIVALLED TOOL FOR EASIER HANDLING OF CABLE REELS.

## THE ORIGINAL – SINCE 1978.

For over 40 years, the ORIGINAL has been the craftsman's helper when unrolling cable reels. For daily use, we have designed a tool in solid pressure casting quality. Equipped with high-quality steel rollers, professionals across Europe know and appreciate the ORIGINAL from Herzebrock. Thanks to this quality known for decades, our ORIGINAL can withstand even the greatest strain in trade and industry.

The simple adjustment of the support rollers through the use of by using spring core axles at a distance allows enables unwinding cable reels of all sizes up to a maximum diameter of 1,200 mm. It goes without saying that our ORIGINAL offers maximum protection against dirt and corrosion because of the use of closed reel bearings that meet up to the high standards of our customers. Rubber feet guarantee perfect stability of the ORIGINAL and provide easy unwinding of particularly heavy reels.

The anti-slip reeling-on ramp of our ORIGINAL is unique. It prevents the cable reel from slipping off during winding up. The ergonomic design with burr-free, rounded edges promotes maximum safety to the operator. Our ORIGINAL has been known and appreciated for decades as a completely maintenance-free tool, re-gardless of whether our customers use it outdoors or in the workshop.

So it is the little things that make our ORIGINAL so unique – there can only be one!



### VARIABLE

Simple adjustment of the support rollers using spring core axles.



### AVAILABILITY

All parts are interchangeable and available at short notice.



### STABLE

High-quality rubber feet ensure stability and are always available as spare parts.



### PROFESSIONAL TIP

When using swivel castors, the rubber feet are screwed in at the side and stay where they belong. Also a good place for spare rubber feet.

**Roll..Profi**

**ORIGINAL**

**THE ORIGINAL –  
FOR CABLE REELS.**



**Roll..Profi**

**ORIGINAL XL**

**THE ORIGINAL –  
IN LARGE.**



Simply changing the position of the reel bearing rollers by using spring core axes at a distance allows unwinding cable reels of all sizes up to a maximum diameter of 1,200 mm. It goes without saying that our ORIGINAL offers maximum protection against dirt and corrosion because of the use of closed reel bearings.

Screwable rubber feet guarantee perfect stability of the ORIGINAL and provide easy unwinding of particularly heavy reels



**TECHNICAL DATA**

Max. drum weight	200 kg
Max. drum Ø	1,200 mm
Max. reel width	670 mm
Dimensions (L x W x H)	530 x 710 x 100 mm
Weight	9.1 kg

**ORDER CODE**

ORIGINAL XL	A90103
-------------	--------

**ACCESSORIES**

LENKROLLEN (set = 4 pcs.)	A90301
---------------------------	--------



**SPARE PARTS,  
TECHNICAL DATA  
AND MORE**



**IN USE**



**PROFESSIONAL TIPP**

**MORE ABOUT THE PRODUCT**

**TECHNICAL DATA**

Max. drum weight	200 kg
Max. drum Ø	1,200 mm
Max. reel width	520 mm
Dimensions (L x W x H)	530 x 550 x 100 mm
Weight	7.5 kg

**ORDER CODE**

ORIGINAL	A90101
----------	--------

**ACCESSORIES**

LENKROLLEN (set = 4 pcs.)	A90301
---------------------------	--------



**SPARE PARTS,  
TECHNICAL DATA  
AND MORE**



**IN USE**



**PROFESSIONAL TIPP**

**MORE ABOUT THE PRODUCT**

Based on the ORIGINAL, the ORIGINAL XL offers the possibility of uncoiling cable reels up to a width of 670 mm. This tool is designed for daily use. Equipped with solid pressure casting and fitted with high quality steel rollers, the ORIGINAL XL withstands the highest strains found in industrial and warehouse environments.

**Roll..Profi**

**ORIGINAL XS**

**THE ORIGINAL –  
IN SMALL.**



The ORIGINAL XS offers all the advantages of the ORIGINAL in a small spaces. Designed for use in switch cabinet construction or for unrolling air hoses, this little helper is always ready to assist the professionals.

The ORIGINAL XS is particularly useful in the CABLEDEPOT, as it takes on a professional dual role with small reels.



**SPARE PARTS,  
TECHNICAL DATA  
AND MORE**



**▶  
IN USE**



**▶  
PROFESSIONAL TIPP**


**MORE ABOUT THE PRODUCT**

**TECHNICAL DATA**

Max. drum weight	200 kg
Max. drum Ø	1,200 mm
Max. reel width	220 mm
Dimensions (L x W x H)	530 x 260 x 100 mm
Weight	4.9 kg

**ORDER CODE**

ORIGINAL XS	A90104
-------------	--------

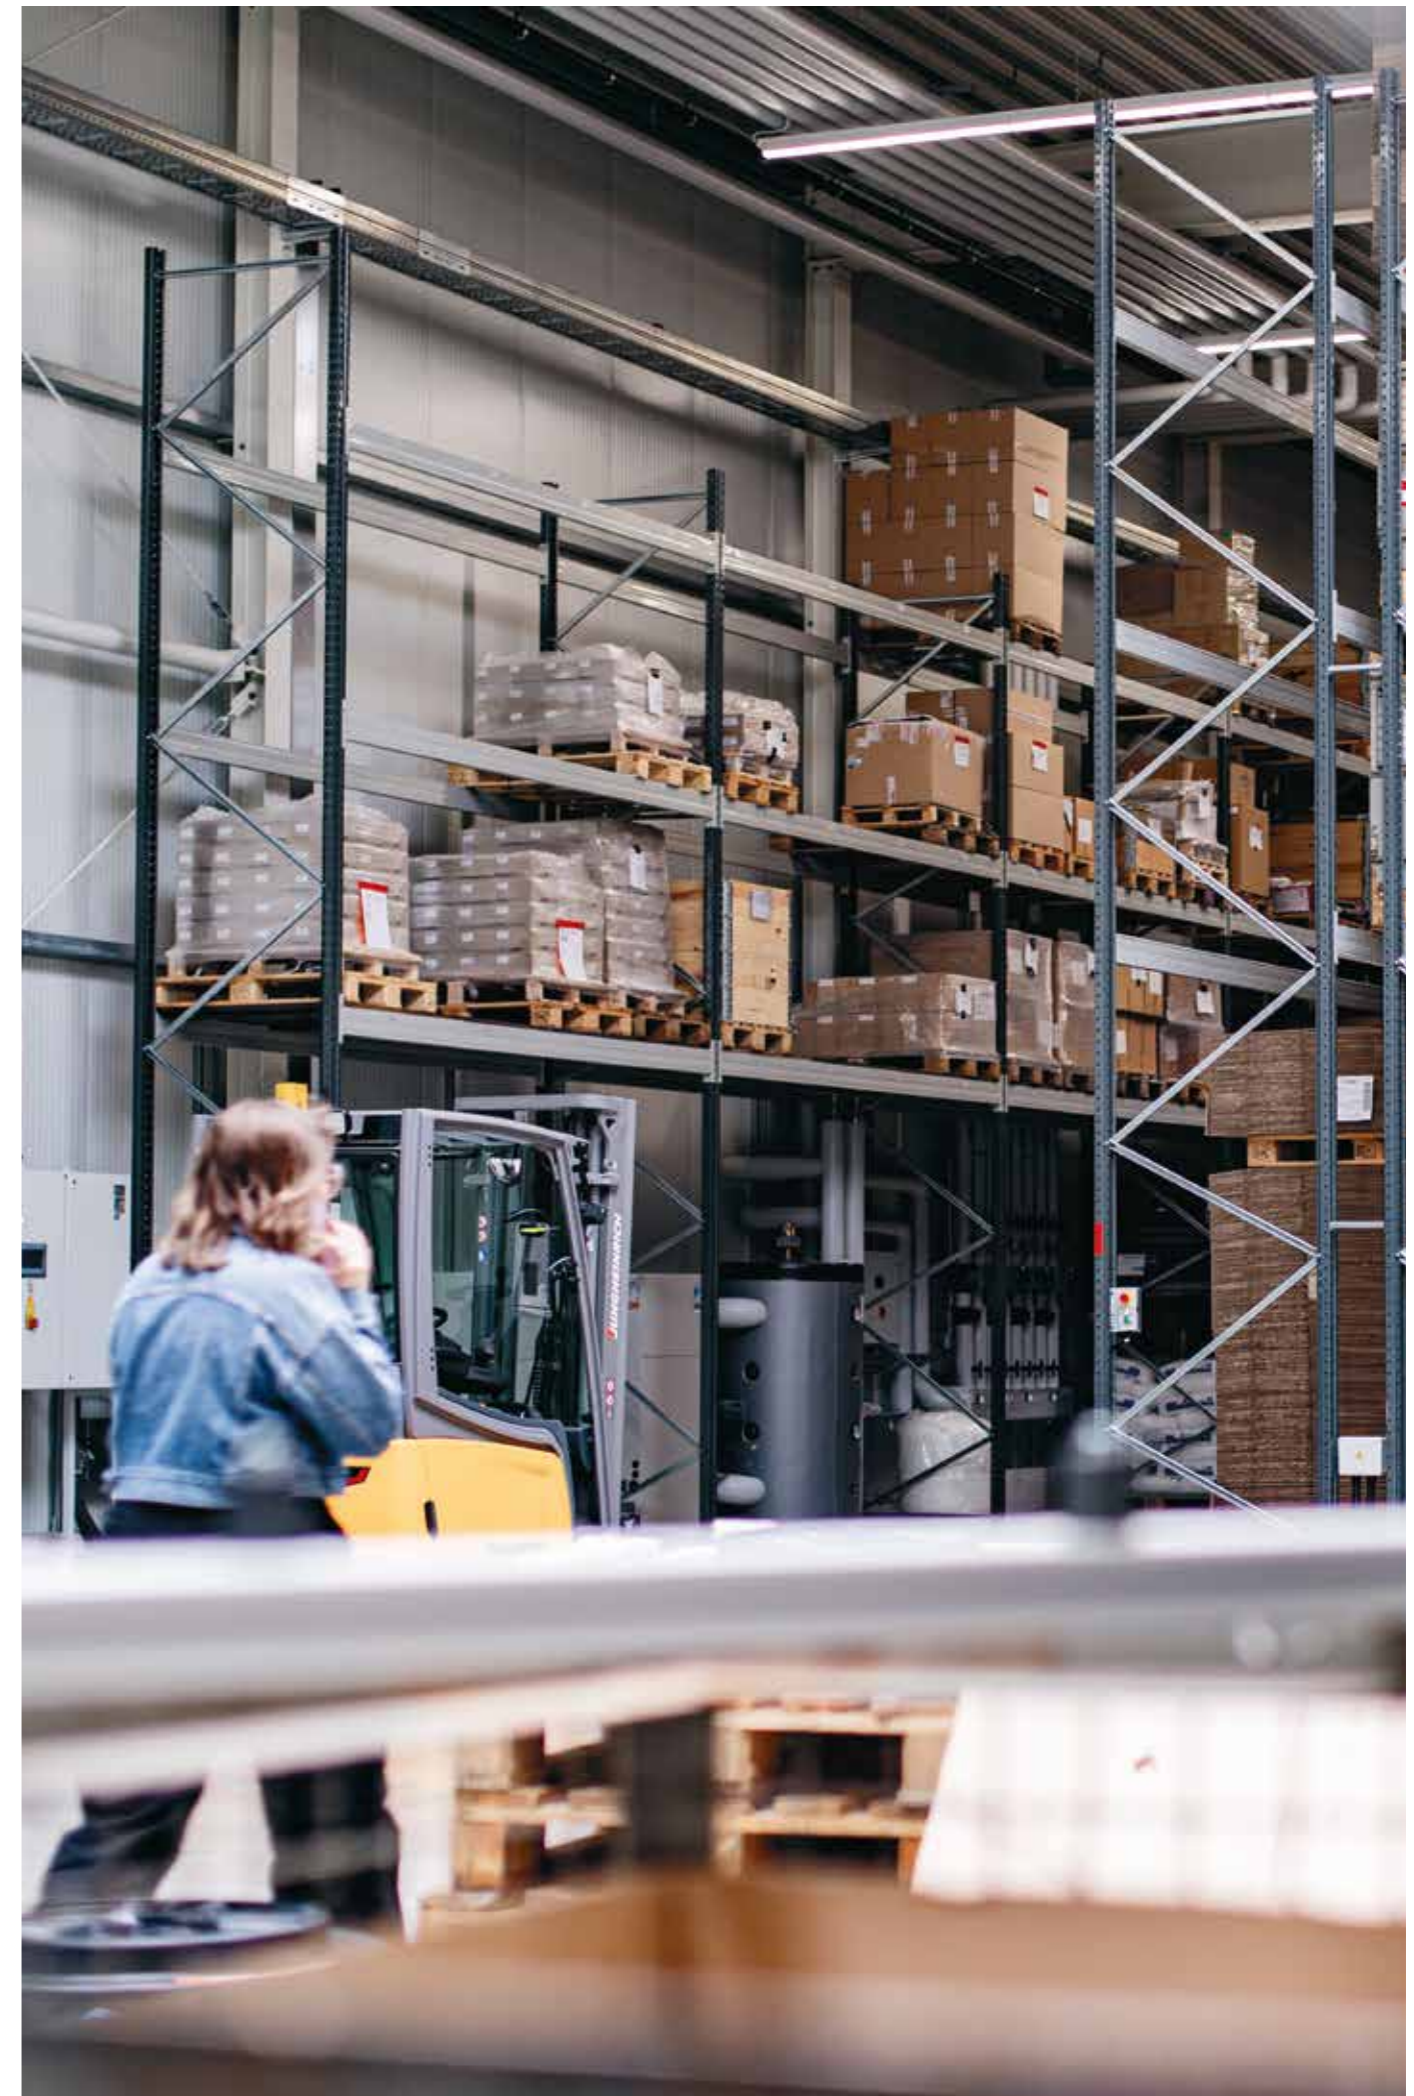



**new**



# NOW IT GOES HIGH-UP!

**SIMPLY ATTACH TO THE ORIGINAL – THE SOLUTION FOR ALL SMALL OR DEFECTIVE REELS.**



## PRACTICAL

Everything is stored in the practical bag. Two side parts and cable reel axle with cones – everything is always to hand!



## PERFECT

The axle is supported on both sides by two high-quality ball bearings. Smooth running is guaranteed!



## WELL THOUGHT OUT

The cones are clamped by captive screws without tools – the perfection that you know and expect!



## PROFESSIONAL TIP

The reel axle can be attached to the side of the TOPROLL using the two rubber loops so that the original can be used with all other reels.



## AS EASY AS LOGIC.

We offer the optimal solution for all small reels with the TOPROLL. Whether made of wood or cardboard, for defective reels or for all cables that can only be unwound with limited tractive force.

Attached to the ORIGINAL, you connect the TOPROLL directly to the popular unwinder from Herzebrock using a positive locking and the captive fastening screw. The cable reel is held by the axle and fixed in place by the cones. Now the axle with the reel is inserted into the bearing-mounted support shells. Everything runs perfectly and smoothly – professional unwinding as you would expect from a Rollprofi.



**Roll..Profi**

**TOPROLL**

**IF YOU WANT IT TO ROLL  
PARTICULARLY EASY.**



With the TOPROLL, your ORIGINAL becomes even more flexible and now performs all rolling tasks perfectly and much more. The TOPROLL can be fitted to all ORIGINAL unwinders built from 2000 onwards. This is only offered by Rollprofi in Herzebrock!

All illustrations show the TOPROLL in combination with our ORIGINAL. Please note that the ORIGINAL is not included in the TOPROLL scope of delivery.



**SPARE PARTS,  
TECHNICAL DATA  
AND MORE**



**▶  
IN USE**



**▶  
PROFESSIONAL TIPP**

**MORE ABOUT THE PRODUCT**

**TECHNICAL DATA**

Max. drum weight	80 kg
Max. drum Ø	500 mm
Max. reel width	450 mm
Dimensions assembled (L x W x H)	616 x 479 x 361 mm
Weight	2.5 kg

**ORDER CODE**

TOPROLL incl. carrier bag	A90111
---------------------------	--------





**Roll..Profi**

**CONTOUR**

**THE SAFETY WHEEL.**



Over the last years damaged cable drums have been a recurring topic for our customers. But even if the situation often seems hopeless, we also have a simple solution for this problem with the CONTOUR.

As you already know from other Rollprofi products, CONTOUR too is technically proven and immediately ready for use. The light construction of shockproof plastic moulding ensures a robust product.

A simple lever mechanism tensions the outer rim thereby ensuring a safe hold on drums of any kind. Only the clamping force is adjusted to the application by using the adjusting screw.

**THE SOLUTION FOR DEFECTIVE DRUMS –  
CONTOUR ON AND DONE.**



**SPARE PARTS,  
TECHNICAL DATA  
AND MORE**



**▶  
IN USE**



**▶  
PROFESSIONAL TIPP**

**MORE ABOUT THE PRODUCT**

**TECHNICAL DATA**

Max. drum weight	200 kg
Max. drum Ø	510 mm
Holding capacity outer rim	55 – 62 mm
Dimensions (L x H)	510 x 510 mm
Weight	2.5 kg

**ORDER CODE**

CONTOUR	A90501
---------	--------

**ACCESSORIES**

Large capacity outer rims Set	A9050112
Holding capacity	79 – 94 mm



reddot winner 2023

**CARRYGRIP – CARRYING REELS AS PROFESSIONALS WOULD.**



Whether loading, carrying, laying down or setting up at the operational site – cable reels are unwieldy and don't make your work easy.

Now CARRYGRIP is the perfect assistant for all these situations and you have your cable reel always firmly under control. In just a few steps, the tensioning unit is adjusted to the appropriate drum size and locked – and so you can transport together with your colleague a load of up to 100 kg safely and without hurting your back.

The manual carrying system CARRYGRIP offers you everything you need for flexible, ergonomic and safe handling of reels on the construction site.

**Roll..Profi**

**CARRYGRIP**

**THE TEAM PLAYER FOR MORE ATTITUDE.**



**SPARE PARTS, TECHNICAL DATA AND MORE**



**IN USE**



**PROFESSIONAL TIPP**

**MORE ABOUT THE PRODUCT**

**TECHNICAL DATA**

Max. drum weight	100 kg
Max. drum Ø	510 mm
Dimensions per system (L x W x H)	190 x 170 x 450 mm
Weight	0.9 kg

**ORDER CODE**

CARRYGRIP (set = 2 pcs.)	A90801
--------------------------	--------



# COILED CABLE ROLLER

**CLOU**

**CLOU**XL

**CLOU**SLIM

**CLOU**FIX

**CLOU**UP

**CLOU**MOVE


**VARIO**

**VARIO**SLIM



# AS STEADY AS FLEXIBLE!

**THE CLOU FAMILY – VARIETY OF OPTIONS FOR A WIDE RANGE OF PIPE AND CABLE RINGS.**

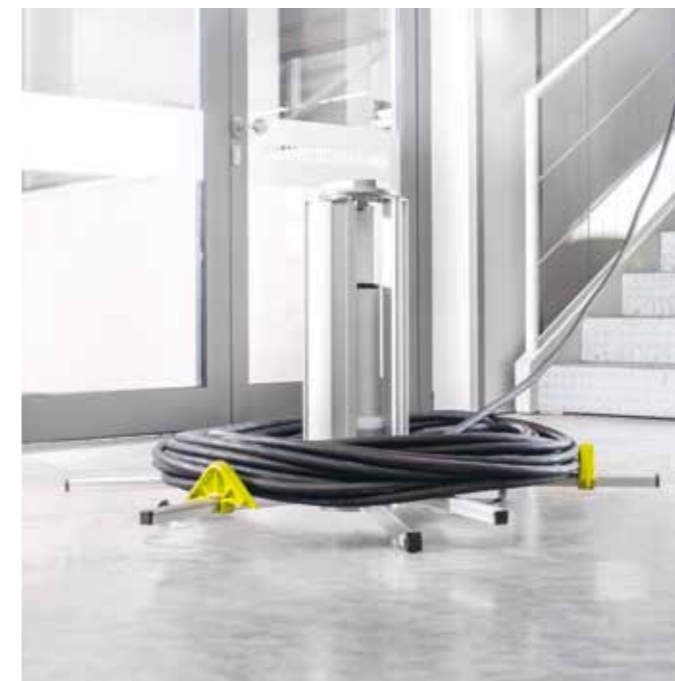

**WELL THOUGHT OUT**  
Quick to unfold – quick to fold – securely packed!

## THE CLOU FAMILY – THE CLEVER SOLUTION FOR EVERY PROBLEM.

For 25 years the absolute number one when it comes to unwinding ring goods. No matter whether cables and wires, empty tubes, chains or steel cables, the CLOU keeps its promises. The professional device can carry up to 80 kilograms and it makes no difference whether the ring goods are in a cardboard box, in foil or even without packaging. It can even handle cable giants like 5 x 25 sqmm or ring diameters of 750 mm.

Only because of the CLOU's proven unwinding technology, it is possible to uncoil the rolled goods from the center of a coil without twisting. This is exactly what has led to the CLOU

becoming a master of its kind. No wobbling, no rattling and no plastic. Set up in just a few steps, the CLOU is ready for unwinding. Of course there are also accessories that make our products so unique:

- CLOU UP – Safe standing on the building shell.
- CLOU MOVE – mobile on the construction site.
- CLOU FIX – if the coil lacks posture.

As with all Rollprofi products, the CLOU has a maintenance free design and guarantees safe handling indoors as well as outdoors.

**Roll..Profi**

**CLOU**

**IDEAL FOR ALL  
RING GOODS.**



**Roll..Profi**

**CLOU<sup>XL</sup>**

**THE MASTER FOR  
LARGE CABLES.**



**TECHNICAL DATA**

Max. ring weight	80 kg
Max. ring outer Ø	750 mm
Ring inner Ø	min. 150 mm max. 260 mm
Max. ring height	350 mm
Installation area	800 x 800 mm
Dimensions (Ø, L)	170 mm, 455 mm
Weight	7.5 kg

**ORDER CODE**

CLOU incl. carrier bag	A90220
------------------------	--------

Based on the CLOU, the CLOU XL offers the possibility of unwinding the largest coiled goods up to a coil diameter of 1,000 mm cable drums and up to a width of 670 mm.

Naturally, the CLOU XL is also professionally packaged with a carrying bag and has all the technical features of the CLOU. Of course, it is maintenance-free and can also be used outdoors.



The CLOU is the professional tool for cable ring processing. Small and easy to transport in its carrying case, the CLOU becomes a high-performance giant in just a few simple steps and without any tools. All coils, whether NYM cable or plastic conduit, are unrolled from the inside without twisting.

A completely maintenance-free tool, regardless of whether you use it outdoors or in the factory.



**SPARE PARTS,  
TECHNICAL DATA  
AND MORE**



**▶  
IN USE**



**▶  
PROFESSIONAL TIPP**

**MORE ABOUT THE PRODUCT**



**SPARE PARTS,  
TECHNICAL DATA  
AND MORE**



**▶  
IN USE**



**▶  
PROFESSIONAL TIPP**

**MORE ABOUT THE PRODUCT**

**TECHNICAL DATA**

Max. ring weight	80 kg
Max. ring outer Ø	1,000 mm
Ring inner Ø	min. 150 mm max. 260 mm
Max. ring height	500 mm
Installation area	1,100 x 1,100 mm
Dimensions (Ø, L)	170 mm, 605 mm
Weight	9.5 kg

**ORDER CODE**

CLOU XL incl. carrier bag	A90221
---------------------------	--------

**Roll..Profi**

**CLOUSLIM**

**SLIM FOR SMALL RING GOODS.**



**TECHNICAL DATA**

Max. ring weight	80 kg
Max. ring outer Ø	750 mm
Min. ring inner Ø	105 mm
Max. ring height	300 mm
Installation area	800 x 800 mm
Dimensions (Ø, L)	165 mm, 420 mm
Weight	5.5 kg

**ORDER CODE**

CLOU SLIM incl. carrier bag	A90224
-----------------------------	--------

The CLOU SLIM is the unwinder for ring goods with a particularly small inner diameter. Based on the proven performance giant CLOU, the CLOU SLIM with its cylindrical but non-adjustable core also offers the option of unwinding tightly wound ring goods from the inside without twisting. Of course, the CLOU SLIM is supplied with our professional carrying bag. The CLOU SLIM is maintenance-free and can be used outdoors as well.



**SPARE PARTS,  
TECHNICAL DATA  
AND MORE**



**▶  
IN USE**



**▶  
PROFESSIONAL TIPP**

**MORE ABOUT THE PRODUCT**



**Roll..Profi**

**CLOU FIX**

**WHEN THE RING LACKS SUPPORT.**



**TECHNICAL DATA**

Weight	0.5 kg
--------	--------

**ORDER CODE**

CLOU FIX (set = 3 pcs.) incl. carrier bag	A90225
--	--------

CLOU FIX holds the ring together if it was supplied without film packaging with bandages. The ergonomic shape of the accessories allows the pipes to slide over the edges without getting caught. This means that even unpackaged empty conduit rings can be unrolled perfectly from the inside without twisting. The use of glass fibre reinforced plastic is a matter of course for a product from Rollprofi. Of course, a practical bag for transport is included in the scope of delivery.



**SPARE PARTS,  
TECHNICAL DATA  
AND MORE**



**▶  
IN USE**



**▶  
PROFESSIONAL TIPP**

**MORE ABOUT THE PRODUCT**



**Roll..Profi**

**CLOUUP**

**SAFE STANDING ON  
THE BUILDING SHELL.**



**TECHNICAL DATA**

Weight 0.5 kg

**ORDER CODE**

CLOU UP (set = 3 pcs.) A90226



CLOU UP takes the CLOU to where it belongs: above the reinforcement! With the help of the clip fastener, you can attach the three-part CLOU UP set to the feet in no time at all, just like you are used to with the Rollprofi – without any tools. And now the unwinder gains in size and supports you safely in the twist-free laying of empty conduits and cables. Of course, CLOU UP can be fitted under all models in the CLOU family.

Small accessories, big impact.



**SPARE PARTS,  
TECHNICAL DATA  
AND MORE**



**▶  
IN USE**



**▶  
PROFESSIONAL TIPP**

**MORE ABOUT THE PRODUCT**



Get your CLOU moving with the CLOU MOVE. The wheels make your CLOU mobile without the need for any tools, just a tricky locking mechanism. All three wheels are of course equipped with a parking brake to ensure a secure stand when unrolling. Of course, CLOU MOVE can be fitted to all models in the CLOU family and ensures mobility on the construction site.



**Roll..Profi**

**CLOUMOVE**

**MOBILE ON THE  
CONSTRUCTION SITE.**



**TECHNICAL DATA**

Weight 3 kg

**ORDER CODE**

CLOU MOVE  
(set = 3 pcs.) incl. carrier bag A90230



**SPARE PARTS,  
TECHNICAL DATA  
AND MORE**




**▶  
IN USE**



**▶  
PROFESSIONAL TIPP**

**MORE ABOUT THE PRODUCT**

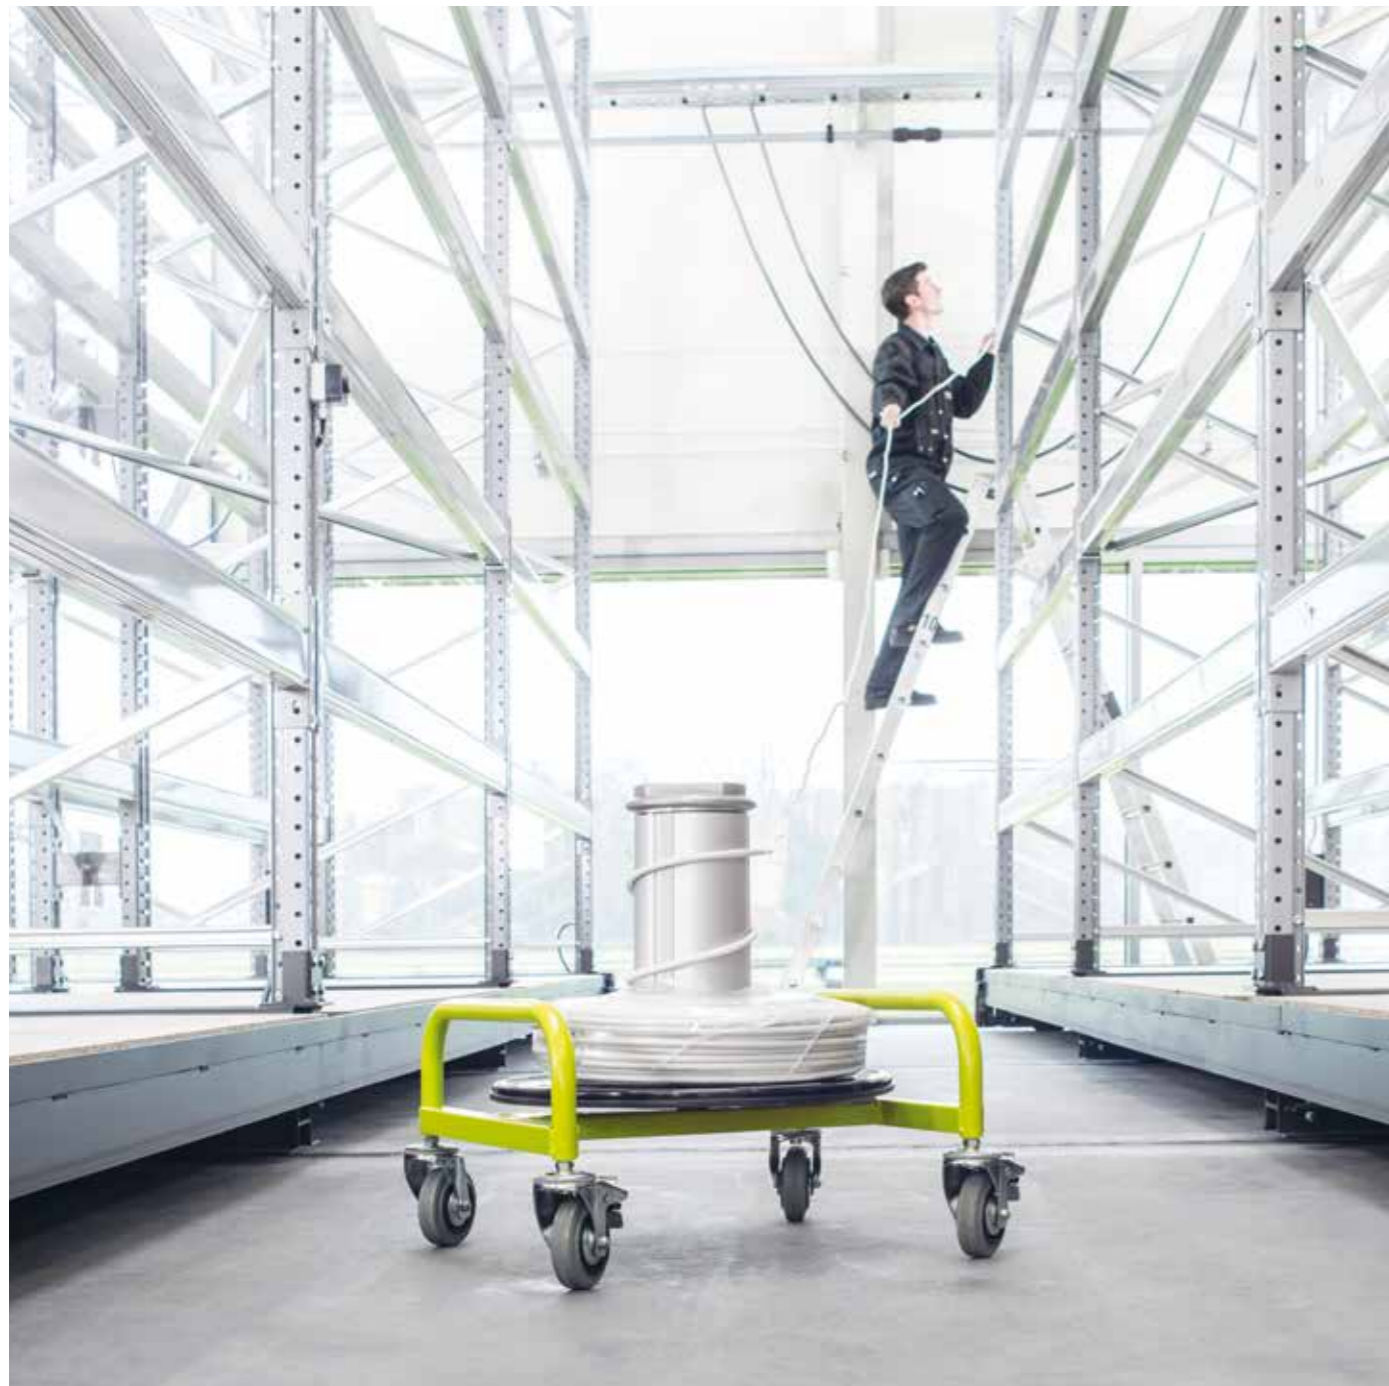

**Roll..Profi**

**VARIO**

**THE MOBILE ONE FOR SMALL RINGS.**

**TECHNICAL DATA**

Max. ring weight	50 kg
Max. ring outer Ø	450 mm
ring inner Ø	min. 150 mm max. 260 mm
Max. ring height	300 mm
Dimensions (L x W x H)	460 x 510 x 530 mm
Weight	13.5 kg

**ORDER CODE**

VARIO incl. Castors (set = 4 pcs.)	A90206
---------------------------------------	--------



**THE VARIO.  
THE FIRST OF IST KIND.**

A new era of ring unwinders began with the VARIO. Equipped with an adjustable core, the unwinder from East Westphalia was the first tool to enable twist-free unwinding of the inner ring. This has made the VARIO a byword for professional cable ring processing for more than 40 years. The VARIO is highly valued by users when installing cables with smaller cross-sections. With a core height of 300 mm and a variable adjustable core, the VARIO offers optimum unwinding conditions at all times.



**SPARE PARTS,  
TECHNICAL DATA  
AND MORE**



**IN USE**



**PROFESSIONAL TIPP**

**MORE ABOUT THE PRODUCT**

**Roll..Profi**

**VARIO SLIM**

**THE CLASSIC FOR SMALL  
INNER DIAMETERS.**



**TECHNICAL DATA**

Max. ring weight	50 kg
Max. ring outer Ø	450 mm
Min. ring inner Ø	95 mm
Max. ring height	300 mm
Dimensions (L x W x H)	460 x 510 x 530 mm
Weight	11 kg

**ORDER CODE**

VARIO SLIM incl. Castors (set = 4 pcs.)	A90207
--	--------



**SPARE PARTS,  
TECHNICAL DATA  
AND MORE**



**▶  
IN USE**




**▶  
PROFESSIONAL TIPP**

**MORE ABOUT THE PRODUCT**



With the VARIO SLIM, the product range of coil unwinders has been expanded to include an unwinder for coils with particularly small inner diameters.


Under the motto "Professional unwinding", the VARIO SLIM offers the possibility of unwinding even tightly wound coils from the inside without twisting. This is possible thanks to its cylindrical core.

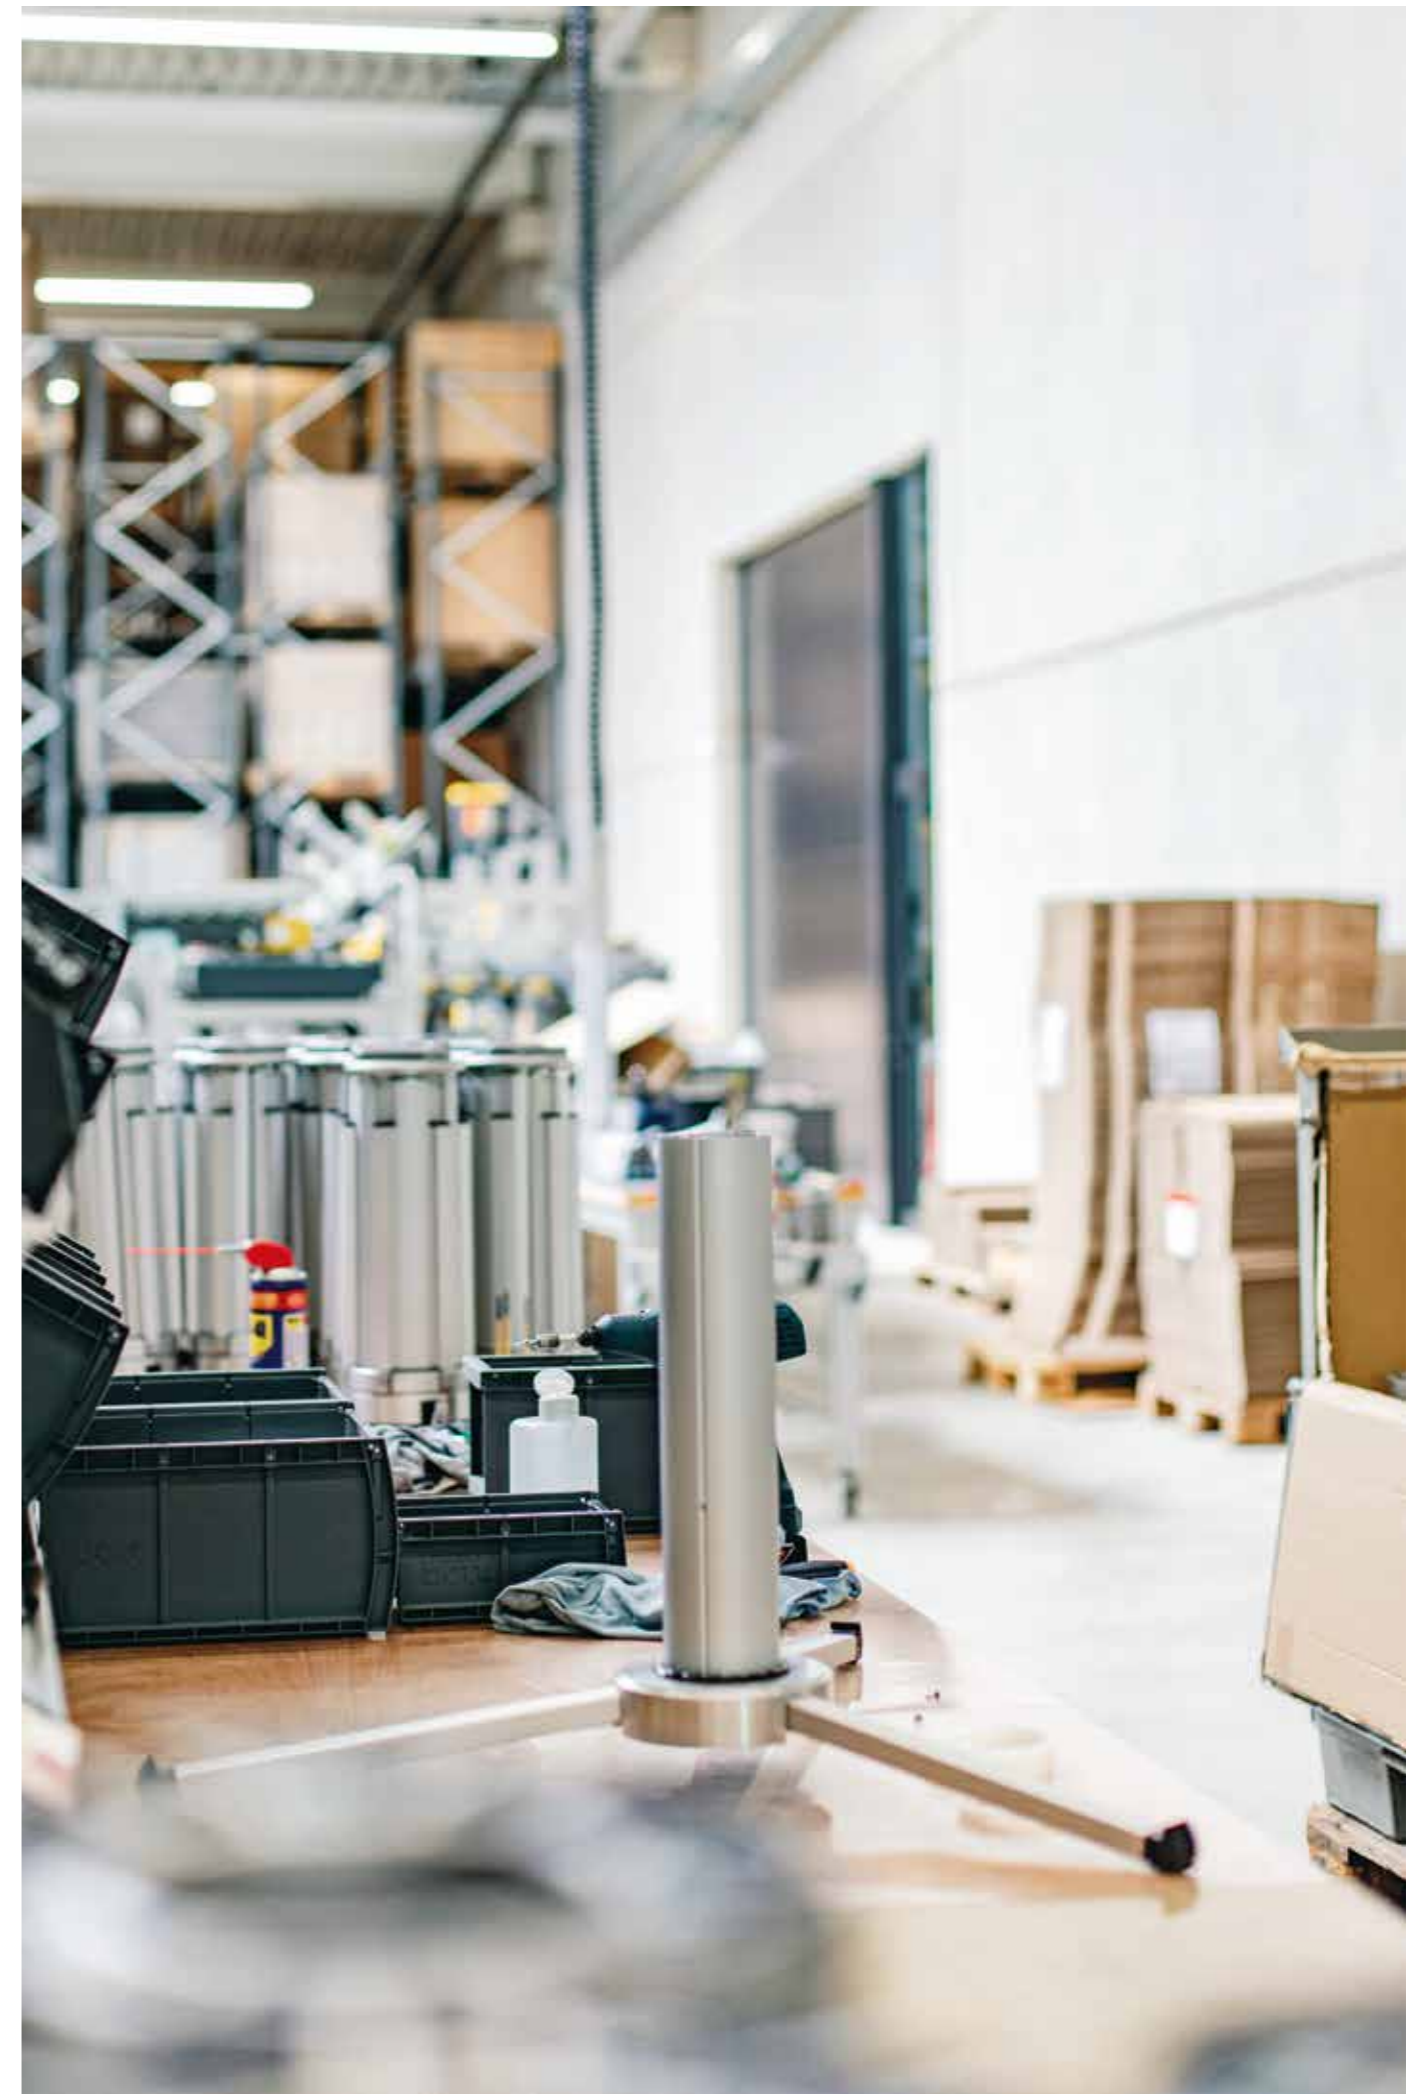



# LARGE CABLE DRUM ROLLER

**JUMBO  
RAIL**

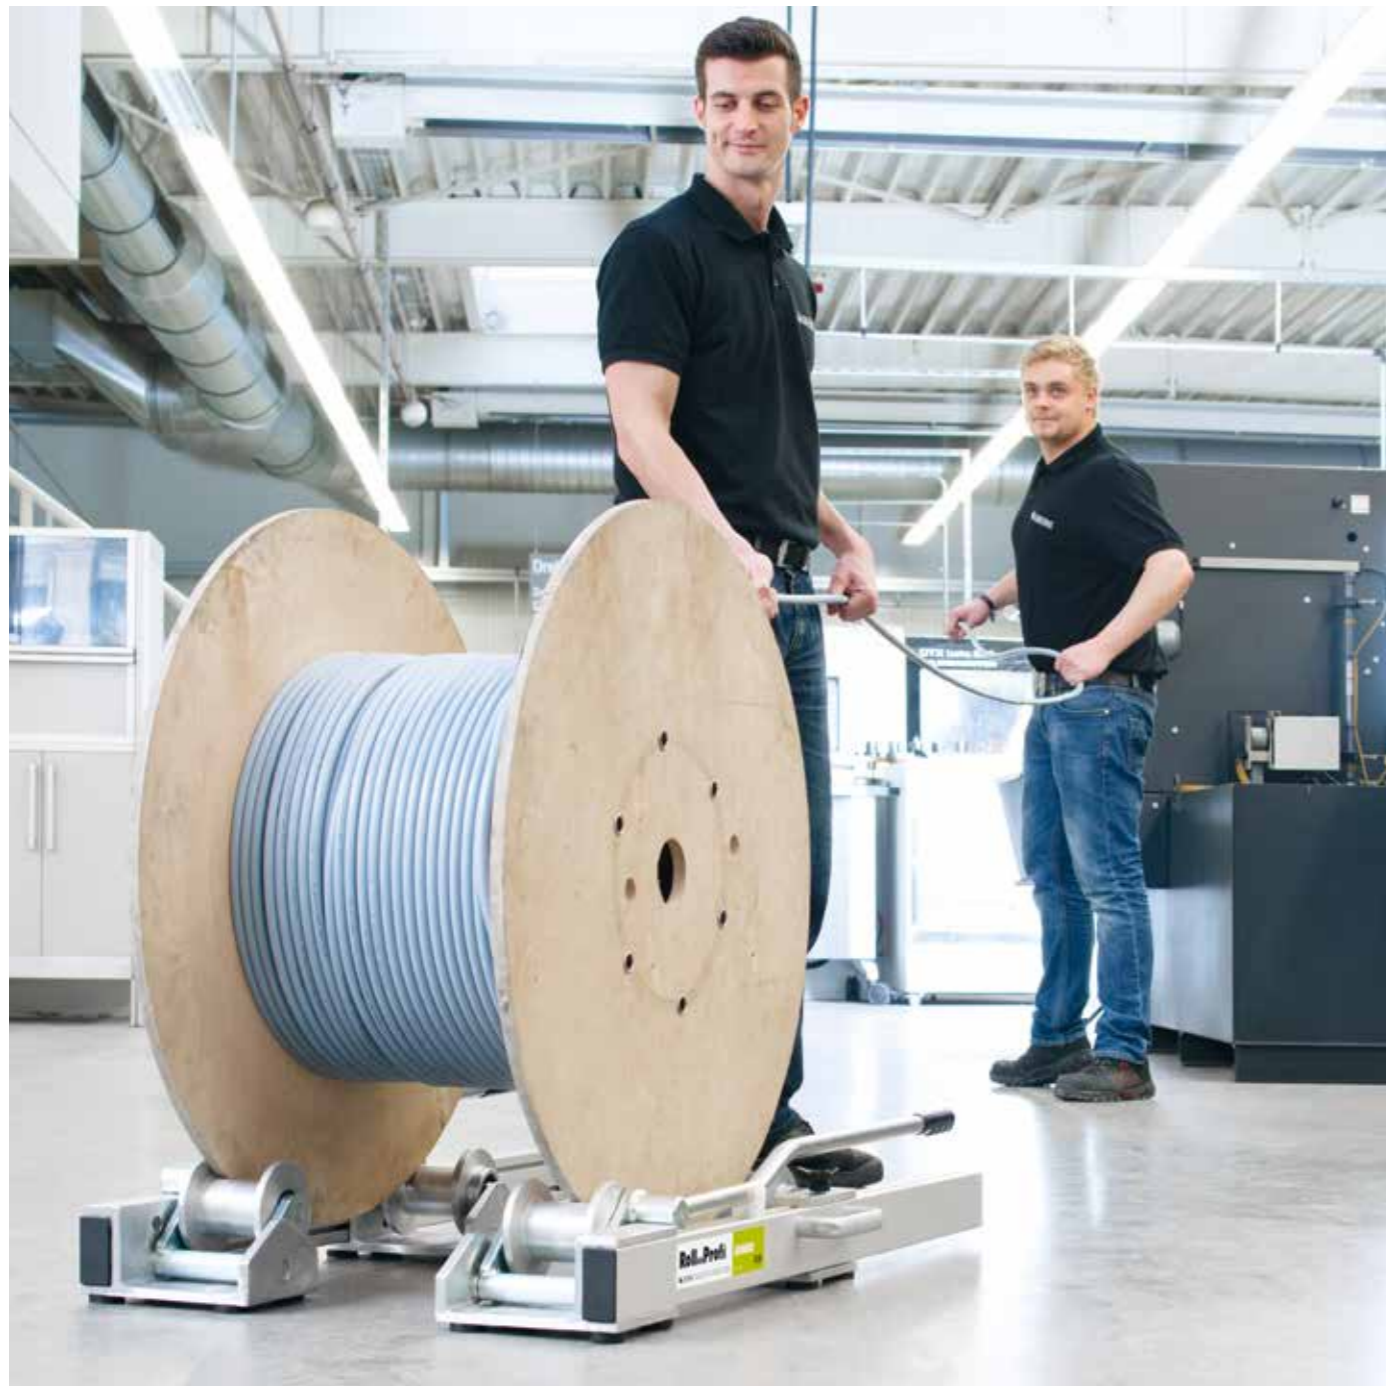

## JUMBO AND RAIL – TWO PROFESSIONALS INTRODUCE THEMSELVES.

When the cable drums get bigger and heavier, the large unwinders from Rollprofi come into play. A maximum drum weight of 1,500 kg is no problem for the high-performance giants from Herzebrock. However, the drum quality should always be taken into account and so we recommend a maximum unwinding weight of 700 kg for wooden drums.



JUMBO or RAIL are used where different cable types have to be processed on large drums. The flexibility offered by the quick and easy change from drum to drum makes the JUMBO and RAIL reliable partners for the heavyweights among drums.

# HEAVY WEIGHTS MADE EASY!

PROFESSIONAL HANDLING AND SAFE UNWINDING OF  
HEAVY CABLE DRUMS.



**Roll..Profi**

**JUMBO**

**SIMPLE AND FLEXIBLE.**



**TECHNICAL DATA**

Max. drum weight	1,500 kg
Recommended max. rolling weight for wooden drums*	700 kg
Min. drum Ø	500 mm
Max. drum Ø	1,800 mm
Dimensions (L x W x H)	1,206 x 277 x 195 mm
Weight per element	17 kg

**ORDER CODE**

JUMBO A90102

\*Due to the sometimes poor condition of wooden drums, we recommend not to exceed the unwinding weight of 700 kg for easier handling.



**WELL THOUGHT OUT**

Adjust the movable counter rollers according to the drum's diameter. Raise the drum into its unwinding position.

The quick and easy change from drum to drum makes the JUMBO so interesting. The JUMBO is only deployed at the required location.

The drum can be transported to the site of operation by forklift truck or rolled by hand. Place the two parts of the JUMBO on the right and left side of the cable drum. Then adjust the sliding counter rollers to the diameter of the cable reel and use the technically simple lever mechanism to push the cable reel into the unwinding position with little effort.



**SPARE PARTS, TECHNICAL DATA AND MORE**



**▶ IN USE**



**▶ PROFESSIONAL TIPP**

**MORE ABOUT THE PRODUCT**



**Roll..Profi**

**RAIL**

**COMPACT AND STURDY.**

Equipped with high-quality, ball-bearing support rollers, the RAIL is your reliable unwinding tool even for heavy cable products.

Place the two unwinding rails parallel to each other in front of the drum flanges. Then adjust the swivelling rollers to the diameter of the cable drum by simply turning them over. Now, the drum can be rolled over the ramp onto the ready to use RAIL. To remove the cable drum, lock the respective support roller and roll the drum out of the RAIL.



**JUST CLEVER**

The swivelling rollers can subsequently be adjusted to the diameter of the cable drum by simply moving them into position. To roll up and unroll the drum lock the front supporting rollers.

**TECHNICAL DATA**

Max. drum weight	1,500 kg
Recommended max. rolling weight for wooden drums*	700 kg
Min. drum Ø	500 mm
Max. drum Ø	1,400 mm
Dimensions (L x W x H)	903 x 160 x 195 mm
Weight per element	9 kg

**ORDER CODE**

RAIL A90105

\*Due to the sometimes poor condition of wooden drums, we recommend not to exceed the unwinding weight of 700 kg for easier handling.



**SPARE PARTS, TECHNICAL DATA AND MORE**



**▶ IN USE**



**▶ PROFESSIONAL TIPP**

**MORE ABOUT THE PRODUCT**



# HYDRAULIC CABLE DRUM LIFTING JACK


**MINILIFT**

**JUMBOLIFT**

**new** **MINILIFT**CROSS

**new** **JUMBOLIFT**CROSS

**EASYLIFT**

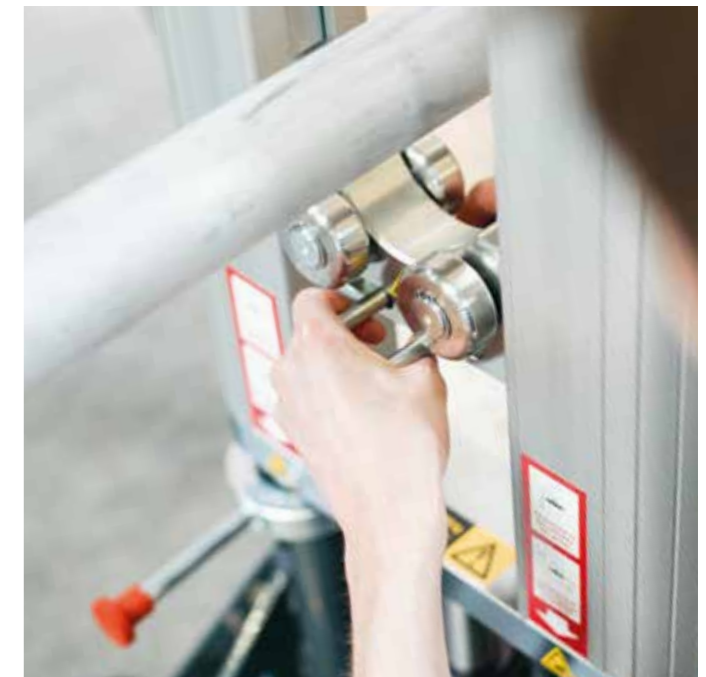

### MINILIFT AND JUMBOLIFT. HIGH-END DRUM LIFTER.

Cable drums with a weight up to 6 t and a maximum diameter of 2.20 meters pose a special challenge in everyday work. The requirements for unwinding such weights are maximum stability and maximum safety. That is why professionals have been opting for our high-performance drum lifters for years. The main advantages of our drum lifters are the mounting blocks that are equipped with floating bearings as well as the centering cones on the drum axle. This guarantees an absolutely smooth and quiet running and reduces the risk of the entire system tipping over.

Each drum lifter is provided as a package consisting of 2 side parts, a drum axle and the corresponding centering cones – and is therefore – as you would expect from a Rollprofi product – immediately ready for use.

These drum lifters from Herzebrock are absolute professionals for use on the construction site. Stable and equipped with a chassis for flexible use, they ensure safe handling of all large cable drums.

# POWER PACKS LIFTING THE DRUMS!

**INNOVATIVE, ROBUST AND UNIQUE!  
THE SOLUTION FOR PROFESSIONAL DRUM HANDLING.**



**SAFE – STABLE**

Height adjustability and compensation for uneven floors.



**Roll..Profi**

## MINILIFT

**POWERFUL UP TO  
4 TONS.**



The strength of the MINILIFT is the easy handling. First fix the cable reel to the reel axle by using the centering cones, then place the movable sides of the reel lifter next to the cable reel.

Now snap the adjustable support block into the guide profile at the height of the drum axle. Lift your cable drum hydraulically by simply pumping and lock the retaining rings underneath the cross member. Now lower your lift system again using the adjusting screw on the hydraulic jack.

Perfect and safe – professional unwinding!

### TECHNICAL DATA

Max. drum weight	4,000 kg
Max. reel width	1,000 mm
Min. drum Ø	650 mm
Max. drum Ø	1,600 mm
Length of drum axle	1,500 mm
Dimensions (L x W x H)	450 x 358 x 863 mm
Weight per side	41 kg

### ORDER CODE

MINILIFT Set: A90112

- two side parts
- one drum axle 1,500 mm
- one Set centering cones Ø 95 mm

### ACCESSORIES

Drum Axle 1,850 mm	A9012060
Set centering cones Ø 140 mm	A9012083



SPARE PARTS,  
TECHNICAL DATA  
AND MORE



▶  
IN USE



▶  
PROFESSIONAL TIPP

MORE ABOUT THE PRODUCT

**Roll..Profi**

## JUMBOLIFT

**POWERFUL UP TO  
6 TONS.**



Easy handling is also the strength of the JUMBOLIFT and similar to its little brother. However, the application range up to a drum weight of 6 tons and a diameter of 2.2 meters is gigantic. The innovative technology of the solid aluminum construction makes it possible to unroll heavy drums safely and easily at any location.

The JUMBOLIFT is proven for use on construction sites. Stable on its solid powder-coated steel frame and equipped with a carriage for optimum use, it is almost identical to its aluminum little brother almost down to the last detail.

### TECHNICAL DATA

Max. drum weight	6,000 kg
Max. reel width	1,300 mm
Min. drum Ø	700 mm
Max. drum Ø	2,200 mm
Length of drum axle	1,850 mm
Dimensions (L x W x H)	500 x 440 x 1,122 mm
Weight per side	72,5 kg

### ORDER CODE

JUMBOLIFT Set: A90121

- two side parts
- one drum axle 1,850 mm
- one Set centering cones Ø 95 mm
- one Set centering cones Ø 140 mm

### ACCESSORIES

Drum Axle 1,500 mm	A9011032
--------------------	----------



SPARE PARTS,  
TECHNICAL DATA  
AND MORE



▶  
IN USE



▶  
PROFESSIONAL TIPP

MORE ABOUT THE PRODUCT

**new**



**ON NEW PATHS!**

**GO FURTHER WITH OUR CROSS MODELS.**



**GET OUT OF THE COMFORT ZONE.**

A new product from the East Westphalian ideas factory are the drum lifts of the CROSS line. Suitable for off-road use with fully rubberised and ball-bearing tyres, increased ground clearance and new handle ergonomics, you can also take the CROSS models outdoors or to the construction site. The proven technology of the Rollprofi drum lifters, which is appreciated by professionals, has remained unchanged.

A unique innovation for anyone who wants to get out of the comfort zone.

**Roll..Profi**

## MINILIFTCROSS

**POWERFUL UP TO  
4 TONS.**



Easy handling is also the fast way to unroll drums up to a weight of 4 tonnes and a drum diameter of 1.6 metres with the MINILIFT CROSS. All functions of the CROSS are exactly the same as those of the MINILIFT and offer the user the convenience of a professional tool.

The MINILIFT CROSS is supplied as a package consisting of two side parts, a drum axle and the corresponding centring cones – and can therefore be used immediately, as you would expect from a Rollprofi.

### TECHNICAL DATA

Max. drum weight	4,000 kg
Max. reel width	1,000 mm
Min. drum Ø	650 mm
Max. drum Ø	1,600 mm
Length of drum axle	1,500 mm
Dimensions (L x W x H)	447 x 505 x 1,095 mm
Weight per side	43.5 kg

### ORDER CODE

MINILIFT CROSS Set: A90130

- two side parts
- one drum axle 1,500 mm
- one Set centering cones Ø 95 mm

### ACCESSORIES

Drum Axle 1,850 mm	A9012060
Set centering cones Ø 140 mm	A9012083



**SPARE PARTS,  
TECHNICAL DATA  
AND MORE**



**IN USE**



**PROFESSIONAL TIPP**

**MORE ABOUT THE PRODUCT**



**Roll..Profi**

## JUMBOLIFTCROSS

**POWERFUL UP TO  
6 TONS.**



**SPARE PARTS,  
TECHNICAL DATA  
AND MORE**



**IN USE**



**PROFESSIONAL TIPP**

**MORE ABOUT THE PRODUCT**

Easy handling is also the strength of the JUMBOLIFT CROSS and is similar to the drum lifter family. However, the range of applications up to a drum weight of 6 tonnes and a diameter of 2.2 metres is gigantic. The innovative technology of the solid aluminium construction makes it possible to roll heavy drums safely and easily, even outdoors.

The JUMBOLIFT CROSS is supplied as a package consisting of two side sections, a drum axle and the corresponding centring cones – and can be used straight away.

### TECHNICAL DATA

Max. drum weight	6,000 kg
Max. reel width	1,300 mm
Min. drum Ø	700 mm
Max. drum Ø	2,200 mm
Length of drum axle	1,850 mm
Dimensions (L x W x H)	527 x 514 x 1,352 mm
Weight per side	76.5 kg

### ORDER CODE

JUMBOLIFT CROSS Set: A90140

- two side parts
- one drum axle 1,850 mm
- one Set centering cones Ø 95 mm
- one Set centering cones Ø 140 mm

### ACCESSORIES

Drum Axle 1,500 mm	A9011032
--------------------	----------





**THE ENTRY-LEVEL MODEL FOR EASY DRUM HANDLING.**



**WELL THOUGHT OUT**

Easy and safe adjustment of height by using the safety device.

**Roll..Profi**

**EASYLIFT**

**THE SMALL UP TO 2 TONS.**

**TECHNICAL DATA**

Max. drum weight	2,000 kg
Max. reel width	850 mm
Min. drum Ø	600 mm
Max. drum Ø	1,200 mm
Length of drum axle	1,350 mm
Dimensions (L x W x H)	500 x 250 x 640 mm
Weight per side	26 kg

**ORDER CODE**

EASYLIFT Set:	A90122
---------------	--------

- two side parts
- one drum axle 1,350 mm
- one Set centering cones Ø 95 mm

**SPARE PARTS, TECHNICAL DATA AND MORE**

**IN USE**

**PROFESSIONAL TIPP**

**MORE ABOUT THE PRODUCT**

As an entry-level model, we offer the EASYLIFT drum lifter with a maximum drum weight of 2 tons and a maximum diameter of 1.2 meters. As with all Rollprofi drum lifters, the hydraulics for pumping up the drum and the drop guard are standard. Unique in the category of entry-level models is the bearing-mounted roller support, which ensures unique rolling comfort.

The EASYLIFT package consists of two side parts, a drum axle and the centering cones and is ready for immediate use.



# CABLE ROUTING

**FLEXIPASS**BAG 3

**FLEXIPASS**L-BOXX 5

**FLEXIPASS**BOX 10

**new** **FLEXIPASS**FIX



# SIMPLY CLEVER THOUGHT AROUND THE CORNER!

THE INNOVATIVE CABLE ROUTING SYSTEM FROM ROLLPROFI.

## FLEXIPASS – QUICK AND EASY CABLE ROUTING FOR PROFESSIONALS.

For almost all cable routings, the prevention of material damage is the top priority, especially for sensitive data cables. Channel curves and differences in height can further complicate the cable pulling. Commercially available deflection products are often complicated and time-consuming to assemble and dismantle. From now on, our FLEXIPASS offers the optimal solution: handy, flexible and immediately ready for use.

With its ergonomic and compact design and smooth-running guide rollers, FLEXIPASS ensures safe and precise cable transfer at all corners and edges of cable trays. Packed in a

professional bag, the basic set consists of three FLEXIPASS. This guarantees a maximum of flexibility at first use immediately. Furthermore, you can add more FLEXIPASS to your cable management system at any time.



It's that simple: Place the FLEXIPASS on the cable tray and fix it quickly and easily with the one-hand clamping mechanism. The FLEXIPASS holds with its rubberised clamping surfaces without cumbersome screwing – no slipping, no tilting.

Now insert the cable, secure with the latch and the FLEXIPASS is ready to uncoil.

**Roll..Profi**

**FLEXIPASS BAG 3**

**THE ALL-ROUNDER**

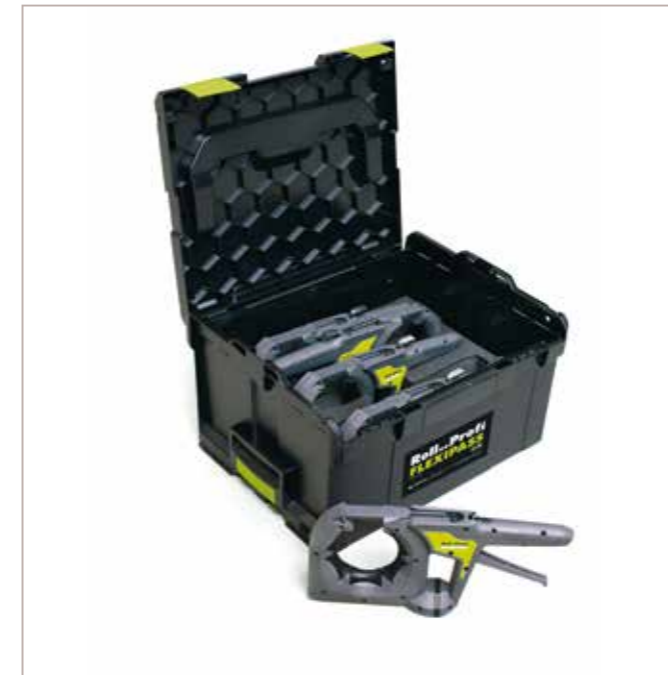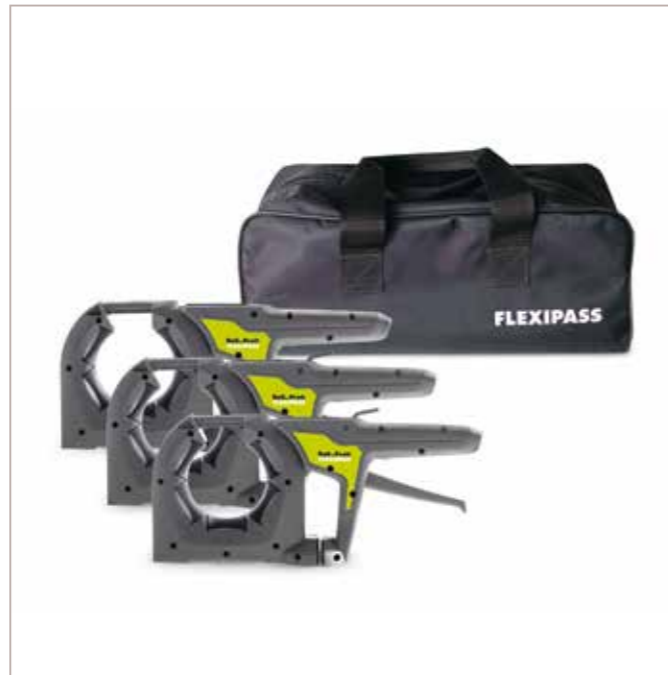

**Roll..Profi**

**FLEXIPASS L-BOXX 5**

**MOBILE – FLEXIBLE –  
SAFE**



**TECHNICAL DATA**

Max. cable Ø	38 mm
Max. clamping width	48 mm
Dimensions (L x W x H)	331 – 379 x 65 x 148 mm
Weight	0.85 kg

**ORDER CODE**

FLEXIPASS BAG 3	A90229
3 pcs. incl. carrier bag	
FLEXIPASS (single)	A9022940



As a partner of the Bosch and Sortimo L-BOXX, Rollprofi also offers you the FLEXIPASS in the perfect L-BOXX 5. It offers space for 5 FLEXIPASS, each of which is safely stored for transport. The FLEXIPASS are neat and organized when you arrive on site. You can check the completeness of your L-BOXX 5 at a glance. Benefit from the modular concept and combine the FLEXIPASS with your tools and materials of the L-BOXX world.

FLEXIPASS L-BOXX 5 consists of an L-BOXX including a special insert and five FLEXIPASS.



**SPARE PARTS,  
TECHNICAL DATA  
AND MORE**



**▶  
IN USE**



**▶  
PROFESSIONAL TIPP**

**MORE ABOUT THE PRODUCT**

FLEXIPASS is the universal cable routing system for cable trays of various designs and can be used for cables up to a diameter of 38 mm. The clever roller arrangement ensures optimum and resistance-free cable routing and transport. With its low weight of 750 g, the FLEXIPASS can easily be used even on light-weight cable trays.

FLEXIPASS is available individually or as a set of 3 pieces in a professional carrying bag which also protects the FLEXIPASS during transport.



**SPARE PARTS,  
TECHNICAL DATA  
AND MORE**



**▶  
IN USE**



**▶  
PROFESSIONAL TIPP**

**MORE ABOUT THE PRODUCT**

**ORDER CODE**

FLEXIPASS L-BOXX 5	A90298
5 pcs. inkl. L-BOXX	

**Roll..Profi**

## FLEXIPASS BOX 10

**WELL PACKED AND STORED:**



Together with our partner AUER PACKAGING, Rollprofi also offers you the FLEXIPASS in the high-quality BOX 10.

It provides space for 10 FLEXIPASS which are safely stored for transport. You will find the FLEXIPASS neat and organized when you arrive on site. FLEXIPASS BOX 10 consists of an AUER BOX and ten FLEXIPASS.



FIX-01

**Roll..Profi**

## FLEXIPASS FIX

**STABLE –  
FLEXIBLE –  
FUNCTIONAL.**



FIX-02

### ORDER CODE

FLEXIPASS FIX-01	A9022925
FLEXIPASS FIX-02	A9022960



**SPARE PARTS,  
TECHNICAL DATA  
AND MORE**



**IN USE**



**PROFESSIONAL TIPP**

**MORE ABOUT THE PRODUCT**

### ORDER CODE

FLEXIPASS BOX 10	A90299
10 pcs. incl. Box	



**SPARE PARTS,  
TECHNICAL DATA  
AND MORE**



**IN USE**



**PROFESSIONAL TIPP**

**MORE ABOUT THE PRODUCT**

FLEXIPASS FIX extends the application range of FLEXIPASS to unimagined possibilities. Whether on a building shell, in an industrial hall, in offices or living areas. With the FIX variants, you can route the cables around sharp edges, into floor tanks, over window profiles or even from room to room. There are no limits to the FLEXIPASS with FIX.


The FLEXIPASS FIX is always supplied without FLEXIPASS devices.





# CABLE STORAGE

**CABLEDEPOT**

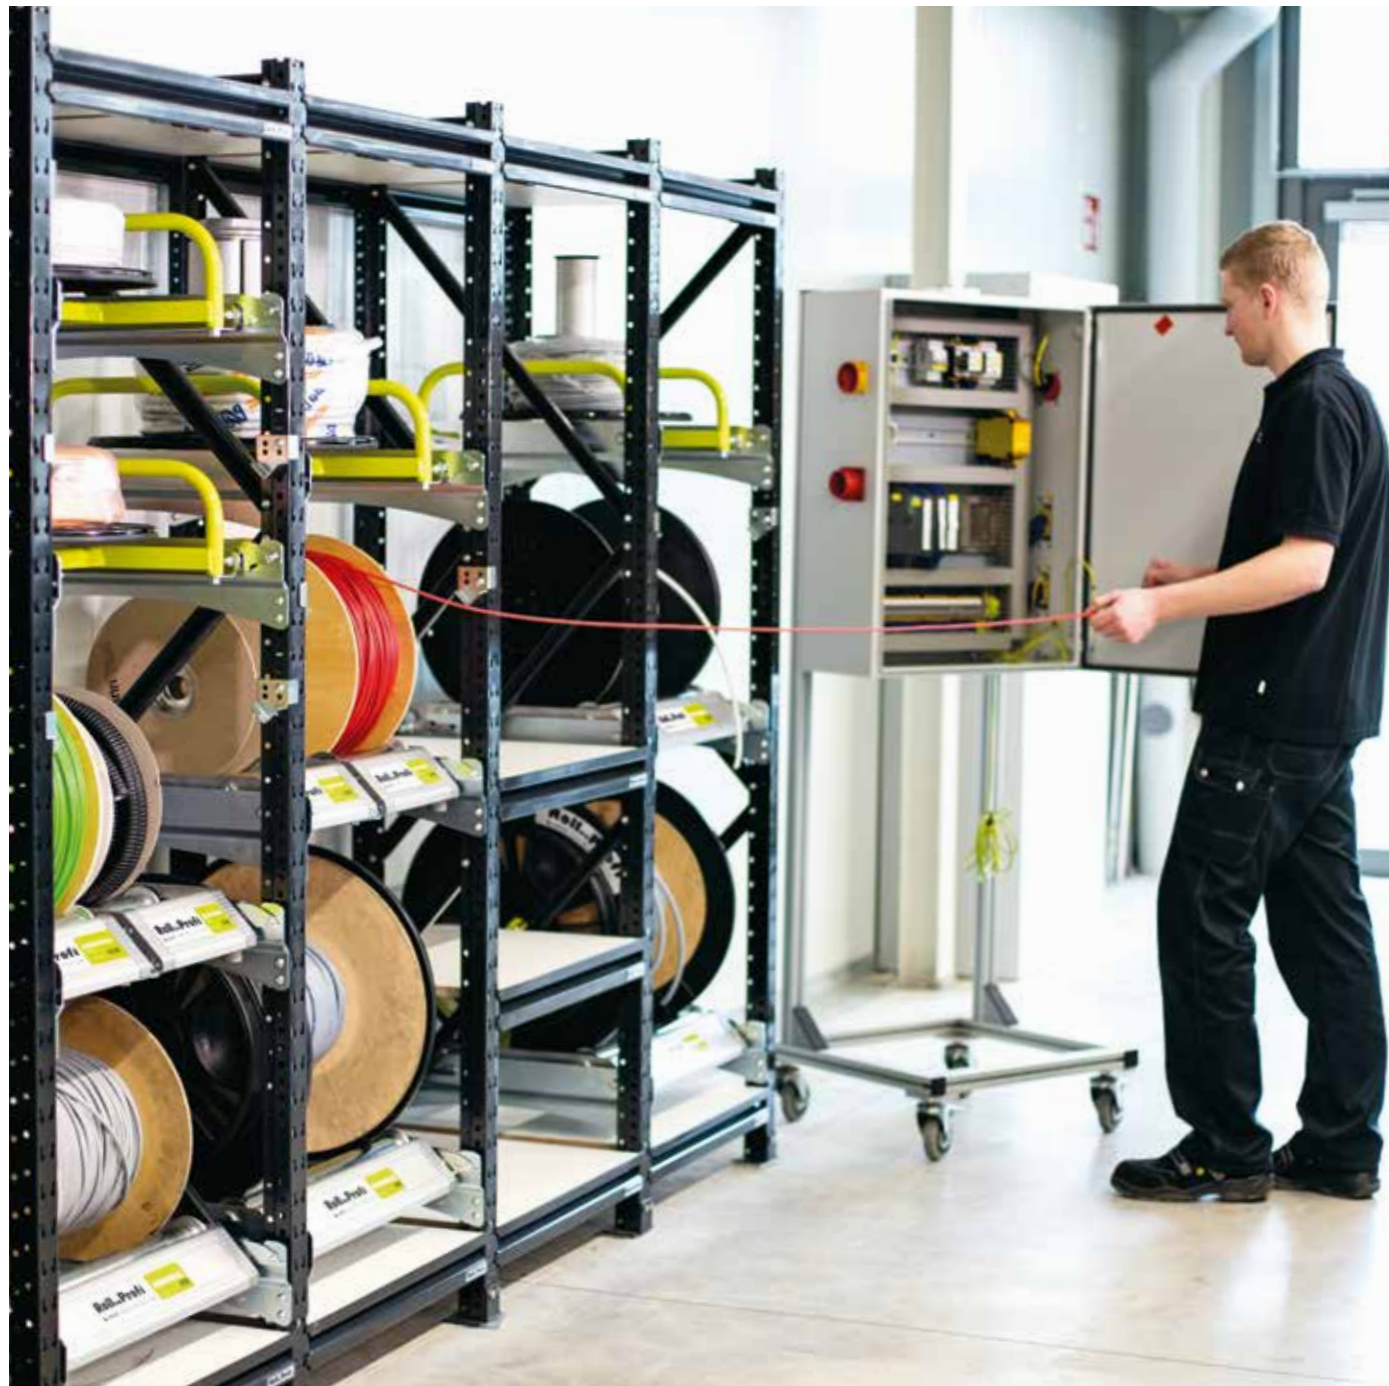

# FLEXIBLE STACKING WITH SYSTEM!

THE MODULAR STORAGE SYSTEM FOR THE ROLLPROFI.



## CABLEDEPOT – AS UNIQUE AS FLEXIBLE.

On the market there already is a wide range of storage systems for cables and wires. However taking a closer look, it soon will be clear that no practicable solutions can be found, particularly for the storage of small drum and ring products. With the new cable storage system from Rollprofi, we offer you a suitable solution: the CABLEDEPOT.

This infinitely expandable system does not end with the storage of cable rings and drums – storage shelves in different lengths are also part of the CABLEDEPOT's range of products. Modules for worktops are also available and expand your range of uses.

With the CABLEDEPOT you are not limited on a rigid division. It allows you a flexible use at any time. Decide today at which place which pipe is stored and simply reorganize the placing the next day.

It is only the height we determine: CABLEDEPOT is available in a maximum height of 2 m. The reason: Your safety is important to us. The CABLEDEPOT is firmly screwed to the floor and does not require a wall bracket.



### SAFE

All uncoilers are secured against falling out.



### HELPFUL

Position for easy loading of the cable coils uncoilers.



### VARIABLE

position of the supportrails is flexible and quickly adjustable.

**Roll..Profi**

**CABLEDEPOT**

**ONE SYSTEM –  
COUNTLESS  
POSSIBILITIES.**

**Facts for professionals:**

- Cable coils with a minimum inner diameter of 95 mm
- Cable coils with a maximum weight of 50 kg
- Cable coils with a maximum outer diameter of 450 mm
- Cable drums with a maximum width of 520 mm
- Cable drums with a maximum weight of 140 kg

As in any warehouse, space is the decisive resource for the CABLEDEPOT too. We offer a particularly space-saving solution with the ORIGINAL DUO: With this, two smaller drums can be uncoiled on the same width of the original. We also have implemented a clever idea for loading ring uncoilers: The uncoiler is pulled forward and lowered in its support rail. This way the ring can be put on easily.

We will not leave you alone with the planning of your CABLEDEPOT. Together we can find the best solution for you out of all available options. Please feel free to contact our friendly service staff with sizes of your available space and an approximate number of rings or drums. In cooperation with you we would be pleased to take over the planning for your CABLEDEPOT.

Or simply configure online:  
[konfigurator.rollprofi.de](http://konfigurator.rollprofi.de)



**SPARE PARTS,  
TECHNICAL DATA  
AND MORE**



**▶  
IN USE**



**▶  
PROFESSIONAL TIPP**

**MORE ABOUT THE PRODUCT**



**OUR SHOW VAN ON TOUR.**

With our enthusiasm for technology and quality, we are on tour with our Show Van. We will be happy to visit you and present our products from the cable reel systems range. We will also be on site with our Rollprofi Show Van during your special event days.



**Roll..Profi**

**#BRUCE\_IS\_ROLLIN**

**KONTAKT**

Contact us to arrange an appointment:

**Lea Enk**  
Corporate Communications  
Trade fairs and presentations

+49 5245 83 09-204  
[enk@luebbering.de](mailto:enk@luebbering.de)

**WE  
COME  
TO YOU!**

The cover made of Gmund Bio-Cycle paper contains up to 50 percent alternative, rapidly renewable natural fibres, the other part is FSC®-certified cellulose.

The inside pages and the print are Cradle to Cradle Certified®.

Cradle to Cradle Certified® is the global standard for safe, recyclable and responsibly manufactured products.

 LÜBBERING

LÜBBERING ABROLLSYSTEME GMBH & CO. KG  
Hans-Böckler-Straße 9  
33442 Herzebrock-Clarholz  
GERMANY

Fon: +49 (52 45) 83 09-374  
Fax: +49 (52 45) 83 09-274  
info@rollprofi.de

www.rollprofi.de  
rollprofi

Luebbering (UK) Ltd.  
www.luebbering.co.uk

Luebbering France  
www.luebbering.de

Luebbering Corp. USA  
www.luebbering.com

Lübbering China  
www.luebbering.de

EN

© LÜBBERING | 2024\_1

